

## Mechanical Component Design via the Internet – An Update

Donald A. Smith  
University of Wyoming

### Abstract

This paper reports the current progress to implement a new paradigm for students in a typical Machine Components Design course in Mechanical Engineering curricula. The fundamental concept is to have design algorithms for various mechanical components (springs, gears, power transmission shafts, cams, etc.) available to students as Applets on the Internet. The students can then focus on the constraints and functional requirements associated with a particular design problem and design the specific component using industrial strength design algorithms. The tedium of iterative calculations is placed on the algorithms and the students are able to concentrate on the selection of parameters appropriate to their specific design application. Initially reported was an Applet for the design of extension springs. The library now includes capabilities for the design of compression springs and spur gears. The Applets have demonstrated their ability to enhance the students' awareness of aspects of the design process while not detracting from their skill level for resolving the detailed calculations typically involved with component design.

### I. Introduction

The design of a mechanical component typically involves an iterative approach to determine an appropriate set of parameters that satisfy the requirements and constraints associated with the specific design problem. For example, in the design of an extension or compression spring for a particular application, the engineer must specify the following parameters:

1. Type of spring to be designed
2. The material to be used to fabricate the spring
3. One or more pair of force-displacement requirements
4. Other requirements as determined by the specific design problem

From the set of design requirements, the engineer then attempts to implement the design with appropriate selection of wire size and spring geometry so that operating stresses will result in satisfactory performance. These types of design problems tend to be highly iterative. This makes them prime candidates for computer implementation once appropriate design algorithms have been identified. If the component design capability is augmented by a user-friendly interface, these programs can serve to improve the students' understanding of the design process by allowing them to focus on design constraints and objectives rather than getting bogged down in the details of the iterative calculations. This strategy also permits the students to pursue various "What If?" investigations of their design without incurring excessive time penalties.

The component design programs are implemented as Java Applets to eliminate the need to store or recompile the algorithms for individual operating environments. From their Internet browser students access and execute the appropriate algorithm from a single server connected to the World Wide Web.

Any software developed for use by other than the developers should incorporate several common capabilities. The user interface should enable a first time user to obtain results without hindering the progress of a more experienced user. Incorporating a comprehensive Help section, along with examples of the most significant features of the program's capabilities, can accomplish this by offering as much or as little help as the user desires. Another requirement particularly appropriate for web-based programs is straightforward navigation between the various parts of the program; with input, results, and the Help section being most important.

The strategy outlined above has been applied to specific mechanical components, resulting in Java Applets which design extension springs, compression springs and spur gears. The Applets have been tested using the students in a Mechanical Component Design class with encouraging results. The remainder of this paper will focus on aspects of the user interface for effective communication between the student with the design problem and the design algorithms which will attempt to generate solutions to that problem.

## II. The Extension Spring Design Calculator - ESDC

The Extension Spring Design Calculator (ESDC) has its roots in a program from the industrial sector that was utilized extensively in the design of extension springs for various printers and other mechanical devices associated with the computer industry. In the mid 1980's, the mainframe version of the program was upgraded and implemented as a PC-resident program with a user interface that guided the first time user while allowing the experienced user to rapidly supply the necessary design requirements to the design algorithms. The interactive version of the program was used as the base from which to generate the current Java Applet version of the extension spring design program, ESDC.

In its present configuration, ESDC permits the user to select one of six possible design cases or the analysis of an existing spring for operation in an environment other than the one for which it was initially designed. The design options are most easily explained with the aid of Table 1.

Table 1 Required Data for the ESDC Design/Analysis Cases

Case	Max Load	Max Working Length	Min Load	Min Working Length	Max or Min Rate (Choice)	Rate (Numeric)	Wire Diameter	Index
1	Yes	Yes	Yes	Yes	No	No	No	No
2	No	Yes	Yes	Yes	Yes	No	No	No
3	Yes	No	Yes	Yes	Yes	No	No	No
4	Yes	Yes	No	Yes	Yes	No	No	No
5	Yes	Yes	Yes	No	Yes	No	No	No
6	Yes	No	Yes	No	No	Yes	No	No
7	Yes	Yes	Yes	Yes	No	No	Yes	Yes

The "yes" and "no" entries in Table 1 indicate the specific parameters which must be specified for a particular design case. Cases 1 through 6 represent the various design situations that are covered by the design algorithms. For example, Case 1 requires that the user specify two load-length pairs. Cases 2 through 5 require one load-length pair, either the load or length at another partial pair, and the selection of a maximum rate or minimum rate spring. Required inputs for Case 6 are the two loads and a numeric value for the spring rate. In this case, the lengths at which the loads are to be produced are left as design variables. While this may seem odd, it is not uncommon in industrial practice to neglect to provide for enough physical space for a spring which must generate specific forces. This can lead to forced redesigns of the apparatus requiring the spring. Thus, case 6 provides a means of determining the space required for a spring that must provide specified forces. Case 7 provides for the fatigue analysis of a particular spring; spring index and wire diameter are specified by the user and a fatigue analysis is performed on the spring. In the design Cases 1 through 6, wire diameter and spring index are varied by the design algorithms as they attempt to effect a design compatible with the user's requirements.

In addition to selecting the design case appropriate to the problem at hand the user can select English or SI units; wire material (music wire, hard drawn wire, or oil tempered wire); end loop orientation (unimportant, 0, 90, 180 or 360 degrees); the number of standard end loops; and the end loop style. These selections are made from radio buttons or pull down menus, providing the user with a familiar operating environment based on standard Windows procedures. The familiar environment is maintained as the user specifies various parameters and choices by "graying out" options that are not available based on previous selections or specified values. The complete page for input is indicated in Figure 1.

Figure 1. The ESDC Data Input-Specification Dialog Box

When the Applet first initializes, all the possibilities for input are displayed as per Figure 1. As the user starts to make choices and specify parameter values inappropriate fields and alternatives are "grayed out"--a technique utilized with most modern operating systems. For example, if the Number of Standard End Loops is set at 2, the text "Spring Inactive Length" will be grayed out and the associated box will become inactive; i.e., the user cannot enter data in that field. Similarly, if design Cases 1 through 6 are selected, Wire Diameter and Index will be grayed out and their data fields will not be accessible. Wire Diameter and Index are varied by the design algorithms as they attempt to satisfy the user input requirements and constraints.

An example of a completed input data page is shown in Figure 2. The user has specified parameters for a Case 1 design, using SI units. The factor of safety has been selected so that only one design is possible in the range of wire diameters considered, 0.125 to 3.25 mm.

CASE	Max Load (N)	Max Length (mm)	Min Load (N)	Min Length (mm)	Min/Max Rate	Rate (N/mm)
Case 1	24.41	49.53	13.34	41.91	Minimum	

Spring Material: Music Wire  
 End Loop Relationship: Unimportant  
 Number of Standard End Loops: 2  
 End Loop Style: Regular Machine Loops  
 Min Number of Coils: 4  
 Factor of Safety: 1.70  
 Max Outside Diameter (mm): unrestricted  
 Min Inside Diameter (mm): unrestricted  
 Spring Inactive Length (mm): [grayed out]  
 Wire Diameter (mm): [grayed out]  
 Index: [grayed out]

Example | Design Spring

Applet Loaded

Figure 2. The Data Input Page Just Prior to Invoking the Design Algorithms

The design algorithms attempt to design springs consistent with the user specified requirements, the fatigue properties of the material selected<sup>1</sup> and the initial tension which is possible to wind into extension springs<sup>2</sup>. For the data of Figure 2, only one spring is possible and the output from the design algorithms is displayed along with an echo of the input data. The top portion of the output page is indicated in Figure 3.

The text "Attempting a design at ..." was originally included to provide the user with feedback from the design algorithms, indicating that the program was progressing through the range of wire sizes appropriate to the design requirements. With earlier versions of Netscape and Internet Explorer the virtual Java machine in the browser was so slow that this feedback was important. Current browsers are considerably faster than earlier versions and the incremental feedback from

the design algorithms is not necessary. However, the "Attempting a design at ..." text was left in the output so the user would know what was processed by the algorithms.

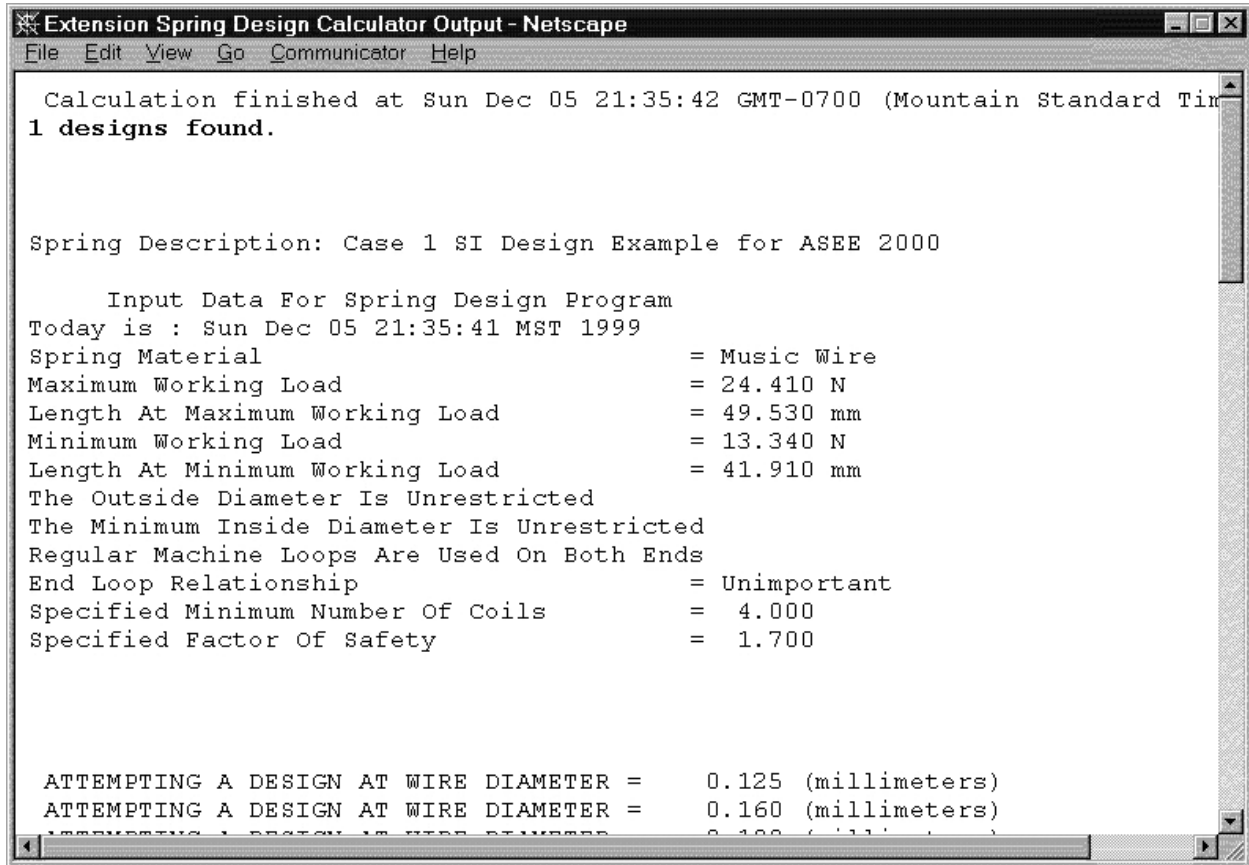


Figure 3. Output from ESDC for the Data of Figure 2

### III. The Compression Spring Design Calculator – CSDC

The CSDC Applet attempts to design compression springs which meet user specified load and length requirements. This Applet incorporates a design algorithm that permits two design cases and an analysis capability that can be used to assess the applicability of an existing spring in a new application. The basic input requirements for CSDC are indicated in Table 2.

Table 2 Required Data for the CSDC Design/Analysis Cases

Case	Max Load	Max Working Length	Min Load	Min Working Length	Wire Diameter	Index
1	Yes	Yes	Yes	Yes	No	No
2	Yes	Yes	No	No	No	No
3	Yes	Yes	Yes	Yes	Yes	Yes

Cases 1 and 2 are the design cases; case 3 is the analysis case. The user can elect to design a compression spring using two specified load-length pairs or a single load-length combination. The material choices for CSDC are music wire, 17-7 stainless steel, beryllium copper, phosphor bronze or spring brass. End types include squared, plain, plain & ground, squared & ground. Either English or SI units are available and constraints can be placed on the maximum outside diameter and the minimum inside diameter as necessary for a particular design application. The design algorithm incorporates stress levels appropriate to the specific material selected. However, if appropriate, the user can override these stress levels. The input for the CSDC Applet is accomplished on a single screen, similar to the ESDC data entry screen. The data entry screen is shown in Figure 4.

Figure 4. The CSDC Data Input-Specification Dialog Box

When the user has completed the design parameter data entry, the algorithm will attempt to achieve designs by varying the wire diameter from 0.102 to 9.53 mm (or the English equivalents) and the spring index from 3 to 15

In the analysis mode the user specifies two load-length pairs, the material, wire diameter and spring index. The Applet displays a modified Goodman diagram for the situation and calculates a factor of safety or indicates the likelihood of a fatigue failure, as appropriate.

#### IV. The Spur Gear Design Calculator – SGDC

The SGDC Applet has two design cases and an analysis capability. One design scenario involves the design of both gears of a meshing gear pair. The other design option will design the

mating gear when the other gear is specified. The analysis capabilities of the program are appropriate when investigating the use of an existing pair of gears in a new application.

If the user elects the English system of units, diametral pitch, loads in pounds force, lengths in inches, power in horsepower, and stresses in psi are appropriate. If the SI system is selected module, loads in Newtons, lengths in mm, stresses in MPa, and power in kW are used.

The input data for design involves either the horsepower or torque at a particular gear, the materials for the pinion and gear, the center distance (either fixed or approximate), pressure angle, pinion RPM, and operating temperature. The analysis case requires additional information for the tooth numbers for the pinion and gear and either the module or diametral pitch. Material properties for steel, cast iron, aluminum bronze, and tin bronze are incorporated into the code and a provision is made for "other" materials. Should "other" material be selected the user is prompted for modulus of elasticity, Poisson's ratio, ultimate strength, bending endurance limit, and surface fatigue strength.

The design algorithms will search for a design with the smallest teeth (maximum diametral pitch or minimum module) that satisfies the design specifications.

#### V. A Typical Classroom Utilization of the Component Design Applets

The Applets have been used in several Machine Components classes, on a variety of problems, with reasonable success. Success is to be interpreted as exposing the students to aspects of the design process which, due to time constraints, extend beyond those typically considered in a components class. A particular example will be considered below.

The specific problem is 12-39D from the Juvinall-Marshek text<sup>3</sup>. In this problem, the students are to design a spring for a wheelchair brake. The problem specifications allow the students to determine a force required at a maximum extension of the spring. The minimum extension the spring will experience in its operating environment can also be calculated from the geometry of the brake. Additionally, a constraint is placed on the maximum outside diameter of the spring. With the maximum load-length pair and the minimum operating length specified, this situation is appropriate for a Case 4 design with a minimum rate requirement to minimize the alternating component of stress. The input parameters yield several designs and the students can then opt for either maximum factor of safety using music wire or a minimum cost design incorporating hard-drawn wire. Thus, the students have to make decisions appropriate to a realistic design situation, but they are not unduly tasked with calculations. A requirement of the assignment was to verify the computer-generated design by an analysis (hand calculations) of their final spring.

The students are given the design problem as part of a homework assignment and, after handing in the homework assignment, the various options that were available and the rationale for making particular choices are discussed in class. This reinforces the concept that there can be multiple solutions to a particular set of design requirements.

#### VI. FAQ

With the background and details of the Machine Component Design Applets above, it is appropriate to address the rationale for this project. Several questions have been posed during the development of the Applets and the most pertinent will be addressed in this "Frequently Asked Questions" section.

*Why do this for mechanical components, i.e., the components typically studied in a Machine Component Design course?*

The analysis of a particular machine component is rather straightforward. Given the loads, operating environment, material, and geometry the stresses can be calculated and various failure criteria applied to determine whether or not the component can be expected to perform satisfactorily. The design problem is far less straightforward. Given the operating environment and (hopefully) the loads acting on the part, the engineer is faced with the task of developing appropriate combinations of material and geometry that will meet the design requirements. The design process tends to be rather iterative, a task appropriate to a computer. Additionally, the contemporary engineering student has many demands on his or her time and becoming involved with repetitive calculations does not represent a particularly appropriate use of that time. Thus, the tedious iterative search for suitable geometry and/or material combinations is relegated to the computer and the student can focus on establishing appropriate constraints and parameters for the design.

*Doesn't the student lose part of the educational experience associated with assuming values for the design parameters and having to reassign those parameters when the initial set or sets do not result in a satisfactory design?*

The short answer is "No". When the Mechanical Engineering student enters the industrial workplace, he or she will most likely have access to in-house or third-party component design programs. One must remember that in the design of a complete machine, the design of each of the individual components is a very small percentage of the overall task. The design of a spring, gear, cam, or power transmission shaft may be an appropriate homework assignment for a Machine Components Design class, but it cannot take a significant amount of time in the industrial environment if the product is to be generated in a timely fashion. Students utilizing computer-aided design tools such as those described are obtaining an industrial perspective during the course of their undergraduate program. Additionally, if the course instructor insists that the students verify the results of a computer generated design, the students are forced to do an analysis that will involve all the parameters associated with the design of the component, thereby reinforcing the interrelationships of the various parameters.

*Why a Java Applet?*

The attractiveness of implementing the design algorithms as Java Applets is associated with the Java Virtual Machine located in current web browsers. Anyone connected to the web can download the Applets into their browser and run the design algorithms locally, on their client machine. When the design task is completed, the Applet does not need to be stored locally; it will be available from the remote server whenever needed. The Applet implementation provides a one time, one way, download of the design algorithms. There is no need for two-way traffic



over the 'net. A major benefit of this strategy is that there is only one copy of the source code to deal with for enhancements or the inevitable glitches.

## VII. Conclusion

The component design Applets reported here represent the first three component design algorithms of what is envisioned as a library of Java based programs for the design of other components. Anyone involved with the instruction of a Mechanical Component Design course is welcome to utilize these Applets, which are available at <http://wwweng.uwyo.edu/commend/>. Feedback from other users regarding their use, or problems encountered, would be greatly appreciated. A convenient mechanism for feedback has been included within the Applets.

## VIII. Acknowledgements

The author would like to acknowledge the contributions of all the other individuals who were instrumental in the development of the current level of the Machine Component Design Applets. The project was initiated in the spring of 1998 with Dr. Aleksander Malinowski (now at Bradley University) and undergraduate students Shawn Cretti, Katarzyna Wilamowska, and Alex Dickson. Shawn and Kasia completed the design algorithms for the various cases and initiated work on the user interface. Hongze Lai, a former graduate student, developed the Applet that displays the Modified Goodman Diagram for the spring analysis capabilities. Colter Reed, another undergraduate student, thoroughly sanitized all the initial work and taught the rest of us how to do it better. Huiyuan Ma, a former graduate student, accomplished the final debug of the graphic applet and implemented the graying out feature of the input screen. She also implemented the CSDC. Mr. Prasad D. Yalla, another former graduate student, implemented the SGDC. The author's Machine Component Design classes have contributed many constructive suggestions regarding the interface, Help section, and other aspects of the program. Everyone's contributions are very much appreciated.

## Bibliography

1. Manual on the Design and Application of Precision Mechanical Springs, Michigan Spring Company, Muskegon, Michigan, July 1984.
2. Chironis, N., Spring Design and Application, McGraw-Hill Book Company, Inc. New York, 1961.
3. Juvinal, R.C. & Marshek, K.M., Fundamentals of Machine Component Design, 3<sup>rd</sup> ed., John Wiley & Sons, 2000.

## DONALD A. SMITH

Don Smith is currently a Professor of Mechanical Engineering at the University of Wyoming. He received his BSME and M.Sc. degrees from The Ohio State University and his Ph.D. from the University of Michigan. Prior to joining the University of Wyoming, he was employed with Xerox and IBM. His academic interests are in the areas of Mechanical Component Design, Kinematics and Dynamics of Machinery, and Computer Aided Design. Current research activity is focused on web based mechanical component design and computer aided laboratory instruction.