



Systems Analysis: Its Proper Utilization Within Systems Engineering Education and Practice

Dr. Wolter J. Fabrycky PE, Virginia Tech and AAI

Wolter J. Fabrycky, Lawrence Professor Emeritus of Industrial and Systems Engineering at Virginia Tech and Chairman, Academic Applications International, Inc. Registered Professional Engineer in Arkansas (1960) and Virginia (1965). Ph.D. in Engineering, Oklahoma State University (1962); M.S. in Industrial Engineering, University of Arkansas (1958); B.S. in Industrial Engineering, Wichita State University (1957). Taught at Arkansas (1957-60) and Oklahoma State (1962-65) and then joined Virginia Tech in 1965. Served as Founding Chairman of Systems Engineering, Associate Dean of Engineering, and then as University Dean of Research over a period of 12 years. Received the Lohmann Medal from Oklahoma State for Outstanding Contributions to ISE Education and Research (1992) and the Armitage Medal for Outstanding Contributions to Logistics Engineering Literature (2004). Received the Holtzman Distinguished Educator Award from the Institute of Industrial Engineers (1990) and the Pioneer Award from the International Council on Systems Engineering (2000). Founder (2005) and President of the Omega Alpha Association: the Systems Engineering Honor Society and President of Alpha Pi Mu: the Industrial Engineering Honor Society (2010-12). Elected to the rank of Fellow in the American Association for the Advancement of Science (1980), the American Society for Engineering Education (2007), the Institute of Industrial Engineers (1978), and the International Council on Systems Engineering (1999). Served or serving on the Boards of ABET, APM, ASEE, IIE, INCOSE, and OAA. Co-author of six Prentice Hall textbooks and Editor of the Pearson Prentice Hall International Series in Industrial and Systems Engineering.

Systems Analysis: Its Proper Utilization Within Systems Engineering Education and Practice

Wolter J. Fabrycky, Lawrence Professor Emeritus at Virginia Tech
and Chairman, Academic Applications International, Inc.

I. Introduction and Prerequisites

From its modest beginnings more than a half-century ago, Systems Engineering (SE) is now gaining international recognition as an effective technologically based interdisciplinary process for bringing human-made systems into being, and for improving systems already in being.¹ However, the main focus of this paper is Systems Analysis (SA) as a necessary part of SE, specifically its proper utilization within systems engineering education and practice.

Systems engineering concentrates on the *engineering* of human-made systems and on systems *analysis*. In the first case, emphasis is on the process of bringing systems into being, beginning with the identification of a need or a deficiency and extending through requirements determination, functional analysis and allocation, design synthesis and evaluation, design validation, deployment, operation and support, sustainment, and phase-out and disposal. In the second case, focus is on the improvement of systems already in being. By adopting and utilizing the iterative process of analysis, evaluation, modification, and feedback, most systems now in existence can be improved in to their operational effectiveness, product quality, affordability, sustainability, and stakeholder satisfaction. Extensive coverage of both of these cases is found in *Systems Engineering and Analysis*, 5/e, 2011.²

Systems engineering may be defined and/or described herein as the technologically based interdisciplinary process for bringing human-made systems and their products (desired entities) into being. While the main focus is nominally on the entities themselves, systems engineering offers private and public enterprises an improved strategy. Systems engineering is inherently oriented to considering “the end before the beginning” and concentrates on *what the entities are intended to do* before determining *what the entities are*, with form following function. Systems analysis is necessary but not sufficient in the process of bringing systems into being.

Instead of offering systems or system elements and products per se, systems engineering focuses on designing, delivering, and sustaining *functionality, a capability, or a solution*. This strategic thinking is now being considered by forward-looking organizations in both the private and public sectors. It is applicable to most types of technical systems, encompassing the human activity domains of communication, defense, education, healthcare, manufacturing, transportation, and others. The advancement and promulgation of this emerging strategy through systems engineering education is a primary aim of this paper.

The focus is on subject matter commonly available within most schools and colleges of engineering. Related areas of Systems Analysis; Engineering Economics (EE), Operations Research (OR), and Management Science (MS) are addressed and synthesized. Educational benefit from integrating known academic areas, overlaid with a Design Dependent Parameter (DDP) paradigm, should be of value to graduates destined for professional engineering practice.

Although sometimes incorrectly called systems engineering, SA is demonstrated to be necessary but not sufficient for teaching and practicing SE. The system design (or synthesis) process leads and sets the pace. Stumbling through the system design space with an evaluation ‘compass’ helps converge system design in the face of multiple criteria. Making value for society relies on converging the design to achieve the desired outcome of “Quicker, Better, and Cheaper”. The SE process, with SA properly embedded, has implications for teaching, research, and professional practice, with guidance for guiding engineering capstone design projects.

Advancing the ASEE 2015 theme “Making Value for Society” requires systems thinking more than ever before. Instead of offering systems or system elements per se, SA properly utilized within SE in this new century should facilitate the discovery of emergent system properties that provide desired *functionality, capability, and improved operations*.

As a more complete introduction, the reader is encouraged to consider the 2010 ASEE paper entitled *Systems Engineering: Its Emerging Academic and Professional Attributes*.³

II. Utilizing Systems Analysis Within SE

System design is the prime mover for systems engineering, with system design evaluation being its compass. System design requires integration and iteration, invoking a process that coordinates synthesis, analysis, and evaluation over the system life cycle as illustrated in Figure 1. Analysis acting alone is not sufficient. It is analysis that drives the design decision evaluation process.

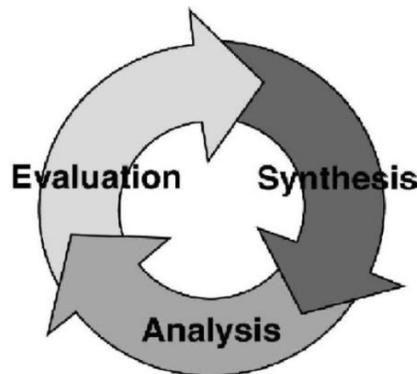


Figure 1. Synthesis, Analysis, and Evaluation Within SE

Consider Figure 2 (left side) regarding the evolution of a decision evaluation capability. Begin with operations and focus on the scientific management thereof. Operations are continuously being researched and an extensive body of systematic knowledge has accumulated, herein called Management Science (MS). MS properly utilized enables the practice of scientific management of the operations researched. This is a knowledge generation, knowledge accumulation, knowledge utilization process for industrial operations that originated more than a century ago.⁴

Next, consider the right side of Figure 2 depicting the application of analysis within design and operations. The first two entries are decision model formulations applicable to operations in general, specifically for systems analysis. The third entry is explicitly for procurement and

inventory operations with recognition of source dependent parameters, enabling better source selection decisions. Herein is the evolved mathematical basis and decision model background for systems engineering and systems analysis.

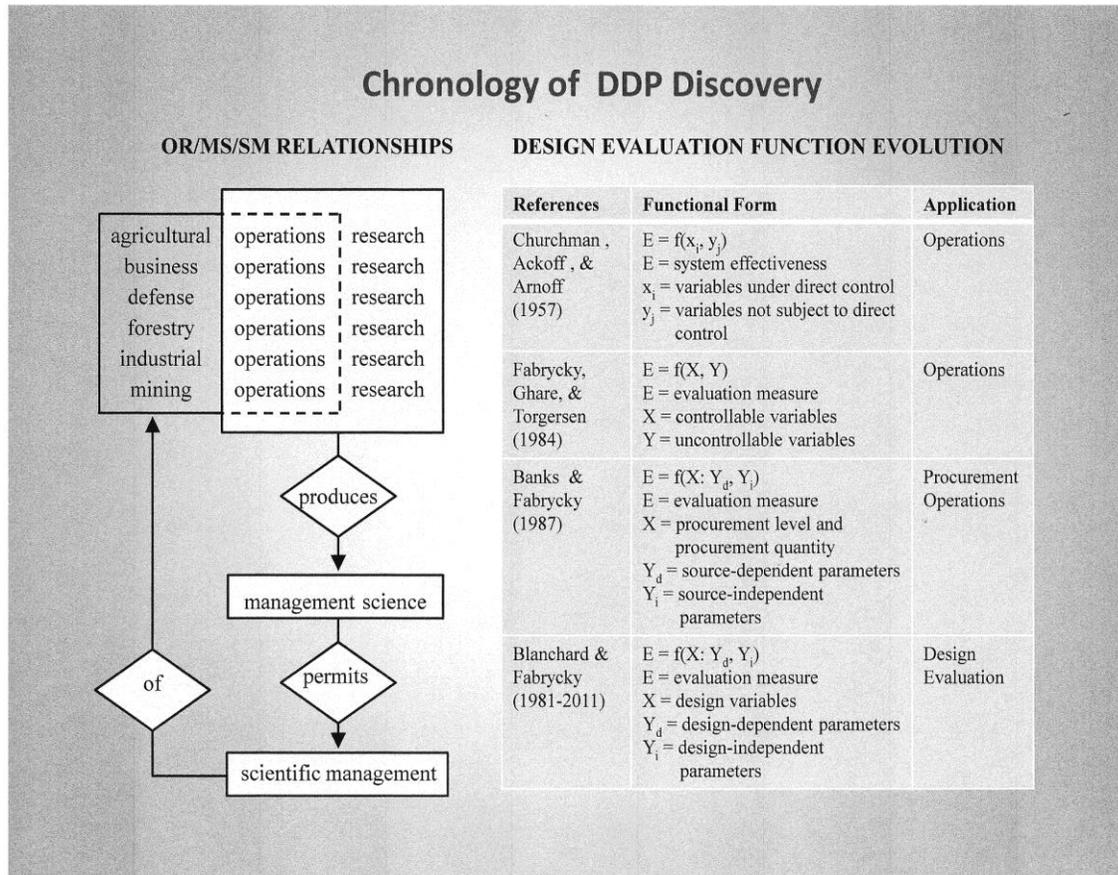


Figure 2. Evolution of the General Design Evaluation Function

Design Dependent Parameters (DDP's) began to appear in the fourth entry of Figure 2 (right). These parameters (producibility, reliability, maintainability, supportability, sustainability, disposability, and others) make possible the evaluation of synthesized system designs. Design dependent parameters are the inner workings of the compass that helps converge systems design in the face of multiple criteria.

The DDP paradigm can now be indirectly traced to the classic *Introduction to Operations Research*, by Churchman, Ackoff, and Arnoff, 1957.⁵ In that year and with that OR book, it was your author's good fortune to study the subject when a M.S. student at Arkansas. But neither the book authors, the professor, nor yours truly could perceive what the generic mathematical construct stated in Chapter 1 could become for the unknown field of systems engineering.

The mathematical construct referenced in this classic book was $E = f(x_i, y_j)$, with the explanation that it was the general form of OR models. It was stated that E represents the effectiveness of the

system under study, x_i the variables of the system which are subject to control, and y_j those 'variables' (implying parameters) not subject to control.

That was all of it. The construct did not appear anywhere else in the book. Nor was it explained as the basic mathematical form behind any specific category of OR models. But, all models presented identified uncontrollables as those factors not taken to be decision or policy variables. These uncontrollable externalities included such factors as capacity, demand, economic indices, unit costs, and others. Since only operations, not design, was the implied application domain, this approach was somewhat useful. But, design variables and the Design Dependent Parameters of reliability, maintainability, producibility, disposability, and others were not mentioned or even recognized. An index search of modern OR books by yours truly failed to reveal citations that would embrace DDP's, much less parameters in general.

With the publication of *Applied Operations Research and Management Science* by Fabrycky, Ghare, and Torgersen (Prentice Hall, 1984) a comprehensive mapping of Churchman, et. al. on most of the categories of OR/MS models became available.⁶ Although limited to the domain of operations, this textbook made explicit the role of parameters for the designation of certain uncontrollables for application in evaluating alternatives. This book was focused exclusively on the improvement of operations, mostly through optimization. The domain of design and design dependent parameters still had not been recognized.

It was not until the advent of USAF Project RAMCAD during 1986-88, with TRW and Virginia Tech as partners, that the need to rigorously evaluate design alternatives was specified as a deliverable. During the conduct of this research, system parameters were partitioned formally into design dependent and design independent subsets. The result was a Design Evaluation Function of the form $E = f(X; Y_d, Y_i)$, shown last in Figure 2.

Although too late for the First Edition in 1981, all subsequent editions of *Systems Engineering and Analysis* by Blanchard and Fabrycky incorporated the DDP concept for system design evaluation.¹ Also, an added notion was adopted demonstrating that equivalence must be employed within each alternative; equivalence utilizing both money flow modeling and optimization modeling across design variables. Equivalence in this advanced context was shown to be essential for a valid and fair comparison of mutually exclusive alternatives.

III. The Design Dependent Parameter Paradigm

Each domain of engineering has its own customized analysis methodology for evaluation, and that is celebrated. But this paper emphasizes the importance of Design Dependent Parameters (DDP's - operational outcomes beyond functionality inherent in the design that matter to stakeholders) that occur within all domains of engineering.

DDP's are controllable along with design variables during the process of bringing systems and their products (human-made entities) into being. They are partitioned from Design Independent Parameters (DIP's - externalities not controllable during design). This focus is most effective when based on design for the product life cycle, recognizing the concurrent life-cycle factors of production, support, phase-out; and disposal as is illustrated conceptually in Figure 3.

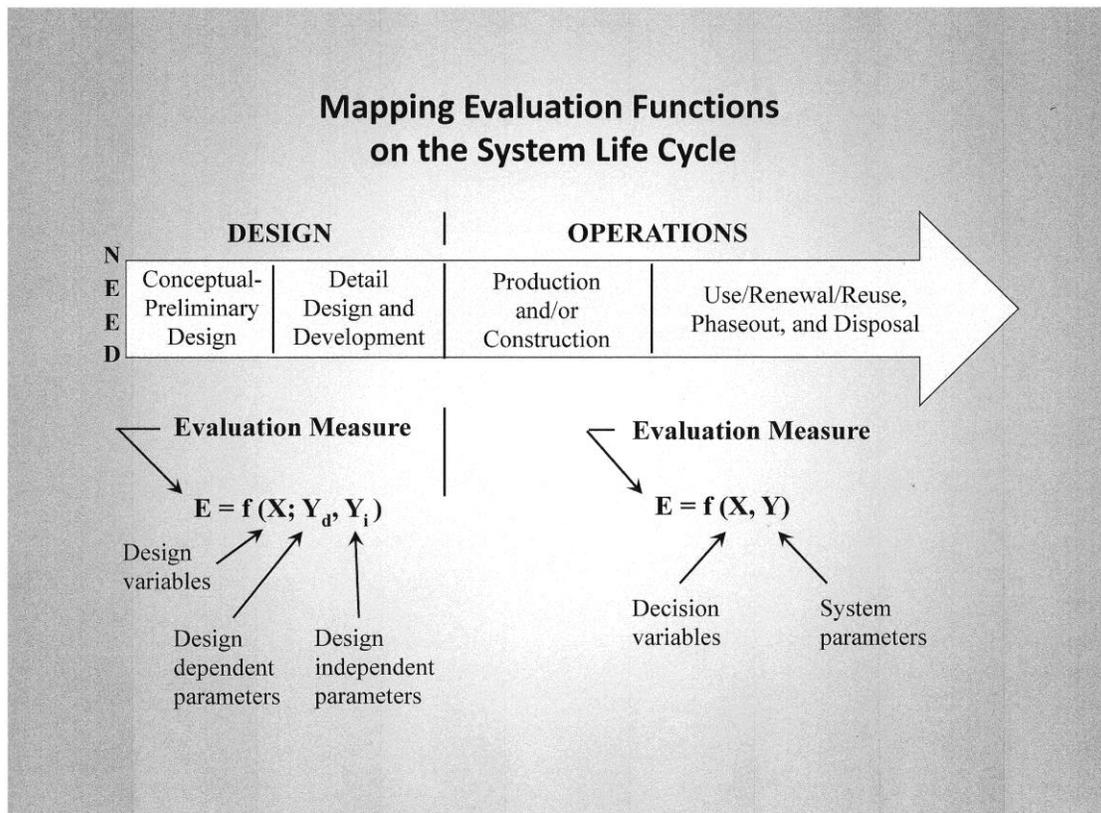


Figure 3. Evaluation in Systems Design and Operations

This innovative DDP paradigm originated and was promulgated based on the congruence of monetary time value and the time line known as the system life cycle. It is the money time value (MTV) principle from engineering economics (EE) and optimization (OPT) inherent in OR that jointly produces an advanced version of 'equivalence'. Equivalence takes on an expanded meaning. The expansion establishes a fair basis for comparing mutually exclusive system design alternatives for each instance of the DDP's predicted from design alternatives.

Two related areas of Systems Analysis, Engineering Economics (EE) and Operations Research (OR), are referenced as prime examples. The EE/OR analysis connection is enabled by a Design Evaluation Function (DEF) derived over the system life-cycle. This function is central to deriving life-cycle cost from predicted design dependent parameter values that emanate from design iteration. Feeding mutually exclusive system design alternatives (first made equivalent) to a Design Evaluation Display (DED) is explained in Section VII.

IV. A Morphology for Systems Engineering

Organization, humankind's most important innovation, is the time-tested means for bringing human-made entities into being. Instead of offering systems or system elements per se, SA properly utilized within SE facilitates the discovery of emergent system properties that provide desired *functionality, capability, or an improved solution*. An integration of process (synthesis)

and evaluation (analysis) is presented that invokes iterating synthesis, analysis, and evaluation over the system life cycle.^{7,8}

Figure 4 provides a high-level schematic of the systems engineering process from a product realization perspective. It is a morphology for linking applied research and the technologies (Block 0) to customer needs (Block 1). It also provides a structure for visualizing the technological activities of synthesis and analysis. Each of these activities is summarized in the following paragraphs, with reference to relevant blocks within the morphology. It is essential that the technological activities of synthesis, analysis, and evaluation of Figure 1 be integrated and applied iteratively and continuously, utilizing the 10 blocks as presented next.

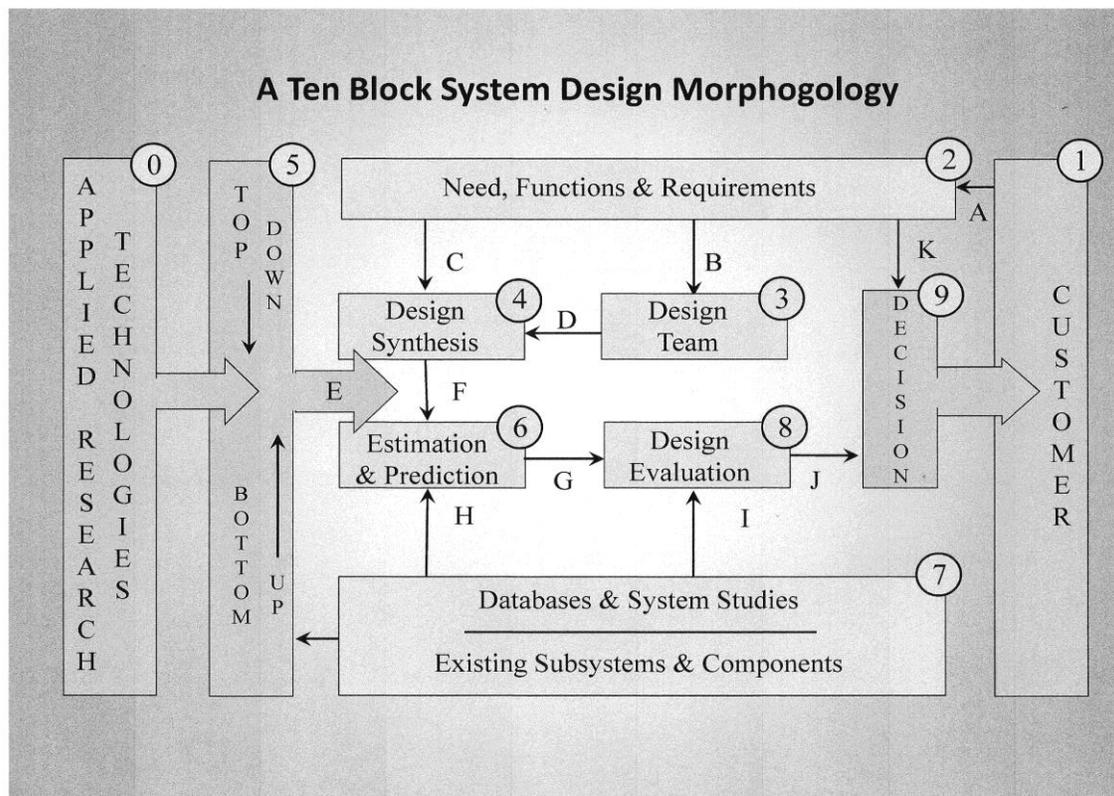


Figure 4. A Morphology for the Engineering of Systems

Synthesis. To design is to synthesize, project, and propose what might be for a specific set of customer requirements, often expressed in functional terms (Block 2). Synthesis is the creative process of putting known things together into new and more useful combinations. Meeting a need in compliance with customer requirements is the objective of design synthesis.

The primary elements enabling design synthesis are the design team (Block 3) supported by traditional and computer-based tools for design synthesis (Block 4). Design synthesis is best accomplished by combining top-down and bottom-up activities (Block 5). Existing and newly developed components, parts, and subsystems are integrated to generate candidate system designs for analysis and evaluation.

Analysis. Analysis of candidate system or product designs is a necessary but not sufficient ingredient in system design evaluation. It involves the functions of estimation and prediction of design-dependent parameter (DDP) values (Block 6) and the forecasting of design-independent parameter (DIP) values from information found in physical and economic databases (Block 7).

Systems analysis and operations research provides a step on the way to system design evaluation, but adaptation of the models and techniques to the domain of design is required. The adaptation explicitly recognizes DDPs and incorporates the mandate of customer requirements.

Evaluation. Each candidate design (or design alternative) should be evaluated against other candidates and checked for compliance with all customers' requirements. Evaluation of each candidate in Block 8 is accomplished after receiving DDP values for the candidate from Block 6. It is the specific values for DDPs that differentiate (or instance) candidate designs.

Design-independent parameter (DIP) values determined in Block 6 are externalities. They apply across all designs being presented for evaluation. Each candidate is made equivalent in Block 8 before being presented to the customer for design decision. (Block 9). It is in Block 9 that the best candidate is sought. The preferred choice is subjective and should be made by the customer.

V. Qualitative Discussion of the Morphology

This section presents a discussion of the functions accomplished by each block in the system design morphology of Figure 4. The discussion will be at a greater level of detail than the description of synthesis, analysis, and evaluation considered above.

The Technologies (Block 0). Technologies are the product of applied research as indicated in Block 0. They evolve from the activities of engineering research and development and are available to be considered for incorporation into candidate system designs. As a driving force, technologies are the most potent ingredient for advancing the capabilities of systems, products, structures, and services.

It is the responsibility of the designer/producer or contractor to propose and help the customer understand what might be for each technological choice. Those producers able to articulate and deliver appropriate technological solutions on time and within budget will attain and retain a competitive edge procurement competitions and/or in the global marketplace.

The Customer (Block 1). The purpose of system design is to satisfy customer (and stakeholder) needs and expectations. This must be with the full realization that the success of a particular design is ultimately determined by the customer, identified in Block 1.

During the design process, all functions to be provided and all requirements to be satisfied should be determined from the perspective of the customer, or the customer's representative. Stakeholder and any other special interests should also be included in the "voice of the customer" in a way that reflects all needs and concerns. Included among these must be ecological and human impacts. Arrow A represents the elicitation of customer needs, desired functionality, and requirements.

Need, Functions, and Requirements (Block 2). The purpose of this block is to gather and specify the behavior of the product or system in functional terms. A market study identifies a need, an opportunity, or a deficiency. From the need comes a definition of the basic requirements, often in functional terms. Requirements are the input for design and operational criteria, and criteria are the basis for the evaluation of candidate system and product configurations.

At this point, the product or system should be defined by its function, not its form. Arrow A indicates customer inputs that define need, functionality, and operational requirements. Arrows B and C depict the translation and transfer of this information to the design process.

The Design Team (Block 3). The design team should be organized to incorporate in-depth technical expertise, as well as the broader systems view and thinking. Included must be expertise in each of the product life-cycle phases and elements contained within the requirements.

Balanced consideration should be present for each phase of the design. Included would be the satisfaction of intended purpose, followed by producibility, reliability, maintainability, sustainability disposability, environmental compliance, and others. Arrow B depicts requirements and design criteria being imposed on the design team and Arrow D indicate the teams contributed synthesis effort where need, functions, and requirements are the overarching consideration (Arrow C).

Design Synthesis (Block 4). To design is to project and propose what might be. Design synthesis is a creative activity that relies on the knowledge of experts about the state of the art as well as the state of technology. From this knowledge, a number of feasible design alternatives are fashioned and presented for analysis. Depending upon the phase of the product life cycle, the synthesis can be in conceptual, preliminary, or in detailed form.

The candidate design is driven by both a top-down functional decomposition and a bottom-up combinatorial approach utilizing available system elements through Block 5. Arrow E represents a blending of these approaches. Adequate definition of each design alternative must be obtained to allow for life-cycle analysis in view of the requirements. Arrow F highlights this definition process as it pertains to the passing of candidate design alternatives to design analysis in Block 6.

Alternatives should be presented for analysis even though there is little likelihood that they will prove to be feasible. It is better to consider many alternatives than to overlook one that may be very good. Alternatives not considered cannot be adopted, no matter how desirable they may have proven to be. Good advice for impatient students.

Top Down and Bottom Up (Block 5). Traditional engineering design methodology is based on a bottom-up approach. Starting with a set of defined elements, designers synthesize the product by finding the most appropriate combination of elements. The bottom-up process is iterative with the number of iterations determined by the creativity and skill of the design team, as well as by the complexity of the system design.

But, a top-down approach to design is inherent within the systems engineering process. Starting

with requirements for the external behavior of any component of the system (in terms of the function provided by that component), that behavior is then decomposed. These decomposed functional behaviors are then described in more detail and made specific through an analysis process. Then, the appropriateness of the choice of functional components is verified by synthesizing the original entity.

Most systems and products are realized through a combination of the top-down and bottom-up approaches, with the best mix being largely a matter of judgment and experience. Arrow F represents the output of candidate designs made ready for analysis.

Estimation and Prediction (Block 6). Cost and effectiveness measures are generated during estimation and prediction, using models and database information, to obtain design-dependent parameter (DDP) values for each design alternative (Block 6). These models and simulations are based on physical laws, assumptions, and empirical data.

The DDP values provide the basis for comparing system designs against input criteria to determine the relative merit of each candidate. Arrow H represents input from the available databases and from relevant studies.

Physical and Economic Databases (Block 7). Block 7 provides a resource for the design process, rather than being an actual step in the process flow. At this point, design-independent parameter (DIP) values are determined and provided to the activity of design evaluation, as represented by Arrow I.

There exists a body of knowledge and information that engineers, economists, and technologists rely on to perform the tasks of analysis and evaluation. This knowledge consists of physical laws, empirical data, price information, economic forecasts, and other studies and models.

Block 7 also includes descriptions of existing system components, parts, and subsystems. It is important to use existing databases in doing analysis and synthesis to avoid duplication of effort. This body of knowledge and experience can be utilized both formally and informally in performing needed studies, as well as in supporting the decisions yet to follow.

Design Evaluation (Block 8). Design evaluation is an essential activity within system and product design and the systems engineering process. It should be embedded appropriately within the process and then pursued continuously as product design and development progresses.

Life-cycle cost is one basis for comparing alternative designs that otherwise meet minimum requirements specified under performance criteria. The life-cycle cost of each alternative is determined based on the activity of estimation and prediction just completed. Arrow J indicates the passing of the evaluated candidates to the decision process. The selection of preferred alternative(s) can only be made after the life-cycle cost analysis is completed and after effectiveness measures are defined and applied.

Design Decision (Block 9). Given the variety of customer needs and perceptions as collected in Block 2, choosing a preferred alternative is not just the simple task of picking the least expensive

design. Input criteria, derived from customer and product requirements, are represented by Arrow K and by the DDP values and life-cycle costs indicated by Arrow J. The customer or decision maker must now trade off life-cycle cost against effectiveness criteria subjectively. The result is the identification of one or more preferred alternatives that can be used to take the design process to the next level of detail. Alternatives must ultimately be judged by the customer. Accordingly, Arrow L depicts the passing of evaluated candidate designs to the customer for review and decision.

Alternatives that are found to be unacceptable in performance terms can be either discarded or reworked with new alternatives sought. Alternatives that meet all, or the most important, performance criteria can then be evaluated based on estimations and predictions of DDP values. This should be accompanied by an assessment of risk.

Within the context of synthesis, analysis, and evaluation is the opportunity to implement systems engineering over the life cycle in measured ways that can help ensure its effectiveness in professional practice. It is a morphology for linking applied research and technologies (Block 0) to customer needs (Block 1). It also provides a structure for visualizing the technological activities of synthesis, analysis, and evaluation. Each of these activities is summarized in the paragraphs that follow, with reference to relevant blocks within the morphology.

VI. Economic Models for System Evaluation

Two broad categories of analytical models are central to formulating a Design Evaluation Function for evaluating mutually exclusive design alternative. These are Money Flow Modeling and Economic Optimization Modeling.⁹

Money Flow Modeling. Money flow modeling is central to the field of Engineering Economics (EE). Engineering economics has always been associated with time; the time value of money, receipts and disbursements over time, etc. The central “model” in engineering economics is the money flow diagram, depicting estimates of income and outlay over time. Accordingly, EE and the product or system life cycle are on the same “dimension”.

Algebraic expressions for the Present Equivalent (PE), Annual Equivalent (AE), and the Future Equivalent (FE), as well as expressions for the Internal Rate of return and the Payback Period are well known in EE. A general economic equivalence function subsuming each of these equivalence approaches is given in Figure 5.

Symbols in the Equivalence Function are defined as follows:

- F_t = positive or negative money flow at the end of year t**
- $t = 0, 1, 2, \dots, n$**
- i = annual rate of interest**
- n = number of years**

There is nothing new here except recognition that EE and life-cycle mapping, as in Figure 3, have much in common. System thinking at a higher level is the key consideration.

**To Determine Cost Equivalence
 Over the System and Product Life-Cycle
 Utilize the Economic Equivalence Function
 PE, AE, or, FE = f (F_t, i, n)**

Figure 5. Equivalence Function for Money Flow Analysis

The Present Equivalent, Annual Equivalent, or Future Equivalent amounts are consistent bases for the evaluation of a single alternative, or for the comparison of mutually exclusive alternatives. These bases for comparison are actually decision numbers, not budgetary amounts.

A disadvantage of money flow modeling is that design dependent parameters are implicit, as are design variables. These are made explicit by economic optimization modeling presented next.

Economic Optimization Modeling. Design evaluation in terms of life-cycle cost and system effectiveness can be facilitated by adopting the Design Dependent Parameter approach. This approach is a mathematical way to link design actions with operational outcomes. It utilizes a Design Evaluation Function (DEF) illustrated in Figure 6 (also see Figure 2).

**To Optimize Within Each Alternative
 Mathematically Link Design and Operations
 Utilizing the Design Optimization Function
 Equivalent LCC = f (X; Y_d, Y_i)**

Figure 6. Equivalence Function for Economic Optimization

The following definitions of terms apply to the DEF in Figure 6:

- E** = a life-cycle complete evaluation measure such as equivalent life-cycle cost (PE, AE, or FE)
- X** = design variables (e.g., number of deployed units, membrane thickness, retirement age, repair channels, rated thrust, pier spacing, etc.)
- Y_d** = design dependent parameters (e.g., weight, reliability, design life, capacity, producibility, maintainability, supportability, etc.)
- Y_i** = design independent parameters (e.g., energy cost, cost of money, labor rates, material cost per unit, shortage cost penalty, etc.)

The Design Evaluation Function must be linked to all phases of the system life cycle. This function, incorporating both design dependent and design independent parameters, facilitates design optimization. It provides the basis for a clarification of the true difference between alternatives (a design-based choice) and optimization (an analysis-based choice).

VII. Choosing the Preferred Alternative

The Decision Evaluation Display (DED) method of making decisions is presented (and preferred for choosing from among mutually exclusive design alternatives and/or candidate systems. Some decision makers consider ranking, elimination, weighting, rating, and similar selection rules to be impediments to the effective application of insight, intuition, and judgment. An alternative is to put the emphasis on visually displaying and communicating only the differences upon which a decision depends, leaving the remaining path to a decision to the decision maker.

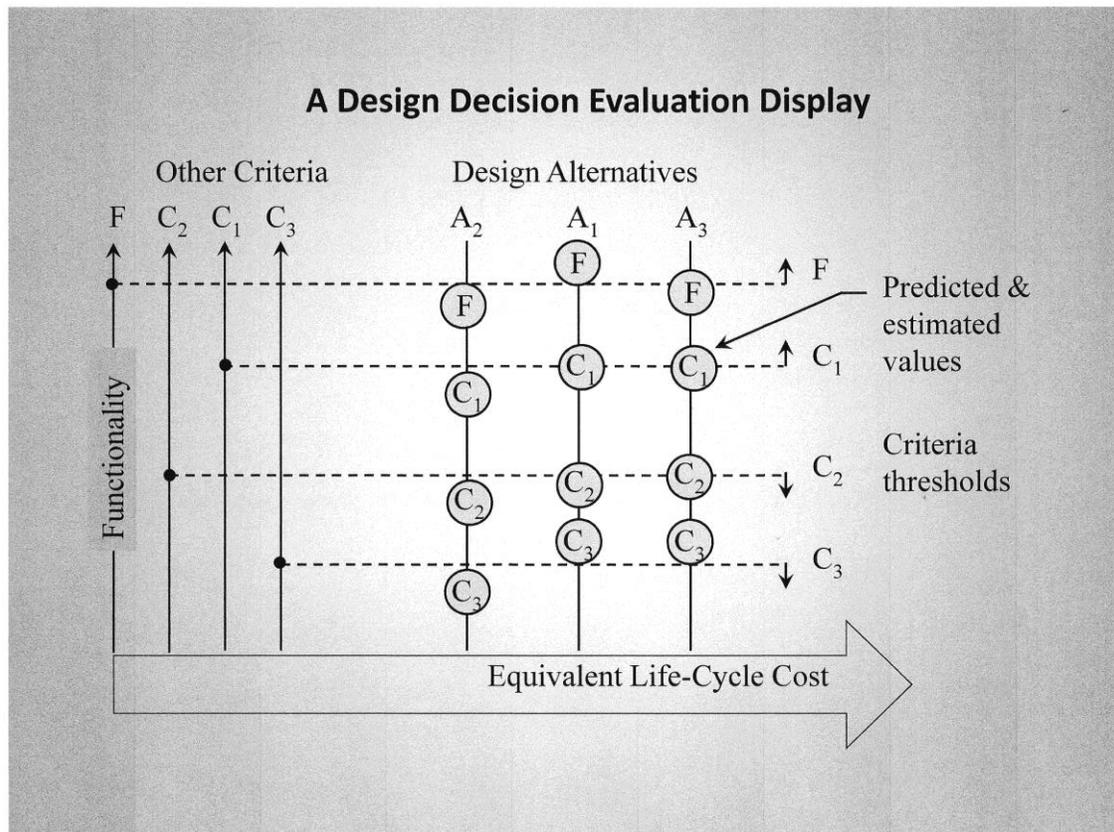


Figure 7. The Decision Evaluation Display for Multiple Criteria

The DED shown in Figure 7 is based on the premise that *differences between alternatives* and the *degree of compliance* with multiple criteria are all that most decision makers need or desire. Experienced decision makers possess an inherent and acquired ability to process information needed to trade off competing criteria. Accordingly, the decision evaluation display is recommended as a means for simultaneously exhibiting the differences that multiple alternatives create in the face of multiple criteria. Component parts of the DED are explained below:

- 1) **Alternatives (A₁, A₂, A₃).** Two or more alternatives appear as vertical lines in the field of the decision evaluation display.
- 2) **Equivalent Life-Cycle Cost.** The horizontal axis represents present equivalent, annual equivalent, or future equivalent cost. Specific cost values are indicated on the axis for each

alternative displayed, with cost increasing from left to right. In this way, equivalent economic differences between alternatives are made visible.

- 3) **Functional criteria (F).** Functions individually, or all together and represented by a derived index, appear at the far left of the vertical axes.
- 4) **Other criteria (C_1, C_2, C_3).** Other vertical axes represent one or more criteria, usually noneconomic in nature. Each axis has its own scale, depending upon the nature of the factor represented.
- 5) **Other criteria thresholds.** Horizontal lines emanating from all vertical axes represent threshold or limiting values for functional and noneconomic criteria (less than, equal to, or greater than).
- 6) **Predicted and/or estimated values.** Anticipated outcomes for each alternative (based on prediction and/or estimation) are entered in circles placed above, on, or below the thresholds. In this way, differences between desired and anticipated outcomes for each alternative are made visible.

Equivalent cost (or profit) from Figure 5, or from Figure 6, or from a DEF combining both, is shown on the horizontal axis of Figure 7, as an objective measure. The aim in decision making is to select the mutually exclusive alternative with the lowest equivalent cost (or maximum equivalent profit) that adequately satisfies the other criteria.

Multiple criteria considerations arise in life-cycle cost analyses during design when both economic and non-economic factors are present in the evaluation. Accordingly, design evaluation in terms of life-cycle cost and system effectiveness is an area in need of attention by the producer and customer acting together. In this situation, a Design Evaluation Display, simultaneously exhibiting both cost and effectiveness measures can be quite helpful.

Requirement thresholds are shown on the display. These are useful to the decision-maker in assessing the degree to which each alternative meets functional and other criteria. This approach is recommended for most applications, because subjective evaluation by the customer and producer can be directly accommodated in a visible way. Trade-offs become visible and can be subjectively considered

VIII. Summary and Conclusions

Legions of academicians and practicing professionals are continuing to develop and apply powerful tools for analysis, experimentation, modeling, simulation, animation, etc. to the domain of operations. These individuals represent the fields of industrial engineering, engineering management, operations research, management science, systems management, and others. Too often the well-intended efforts of these individuals are mistakenly called "systems engineering". These important domains and professional fields are necessary but not sufficient.

Some important areas in need of consideration for improvement in systems engineering education and professional practice are:

- 1) Systems analysis is necessary but not sufficient for SE, and this finding should be imparted in the teaching of each area, with full recognition of the potential value of their integration.

- 2) Design dependent parameters are the key to linking system design to the world being modified by design and all impacted people.
- 3) A DDP based design evaluation function, traceable to OR, should better guide the teaching of design space exploration within the functional domain, backed by equivalence based on life-cycle economics and design optimization, now imparted by separate courses.
- 4) When driven by synthesis and the prediction and/or estimation of DDP values, and the incorporation of optimization across design variables, design evaluation will likely become the key to continuous operational improvement through system design.
- 5) Design impacts on the natural world, including humans, should be incorporated in academic course work (including undergraduate capstone projects) and the project or thesis research required for a graduate SE degree.
- 6) Graduate study in SE should focus on preparing candidates for service as engineering interdisciplinarians, who think always about “the end before the beginning”.
- 7)) The overarching goal should be to promulgate systems thinking focused on the human - made world; that is, the world emerging from system design by humans.¹⁰

Entirely too much engineering time and talent is being expended addressing operational deficiencies plaguing the human-made world. Operational problem mitigation will always be needed, but the dramatic payoff for humankind lies in operational problem avoidance through system thinking, as recommended for addressing pervasive grand challenges.¹¹

REFERENCES

- 1) Panitz, B., Senior Editor, *Training Technology's Maestros*, American Society for Engineering Education, ASEE PRISM, November, 1997.
- 2) Blanchard, B. S. and W. J. Fabrycky, *Systems Engineering and Analysis*, Fifth (30th Anniversary) Edition, Pearson Education - Prentice Hall, 2011.
- 3) Fabrycky, W. J., *Systems Engineering: Its Emerging Academic and Professional Attributes*, Proceedings, ASEE Annual Conference and Exposition, Louisville, KY, June 21, 2010.
- 4) Emerson, H. P. and C. E. Naehring, *Origins of Industrial Engineering*, Industrial Engineering and Management Press, Institute of Industrial Engineers, 1988.
- 5) Churchman, C. W., R. L. Ackoff, and E. L. Arnoff, *Introduction to Operations Research*, John Wiley, 1957.
- 6) Fabrycky, W. J., P. M. Ghare, and P. E. Torgersen, *Applied Operations Research and Management Science*, Prentice Hall, 1984.
- 7) Fabrycky, W. J., "Designing for the Life Cycle," *Mechanical Engineering*, Vol. 109, No. 1, January 1987.
- 8) Fabrycky, W. J. and B. S. Blanchard, "Life-Cycle Design," Chapter 24 in *Design Management: A Handbook of Issues and Methods*, Edited by Mark Oakley, Basil Blackwell, Ltd., Oxford, UK, 1990.
- 9) Fabrycky, W. J., "Evaluation in Systems Engineering", Article E1.28.04.05 in the *UNESCO Encyclopedia of Life Support Systems*, EOLSS Publishers Co. Ltd., 2003.
- 10) Fabrycky, W. J., "Thinking About Systems Thinking", *Proceedings, Third International Conference on Complex System Design and Management (CSDM)*, Paris, France, December, 2012.
- 11) *Educating the Engineer of 2020*, National Academy of Engineering, Washington, DC: National Academy Press, 2005.

Biography

Wolter J. Fabrycky, Lawrence Professor Emeritus of Industrial and Systems Engineering at Virginia Tech and Chairman, Academic Applications International, Inc. Registered Professional Engineer in Arkansas (1960) and Virginia (1965). Ph.D. in Engineering, Oklahoma State University (1962); M.S. in Industrial Engineering, University of Arkansas (1958); B.S. in Industrial Engineering, Wichita State University (1957). Taught at Arkansas (1957-60) and Oklahoma State (1962-65) and then joined Virginia Tech in 1965. Served as Founding Chairman of Systems Engineering, Associate Dean of Engineering, and then as University Dean of Research over a period of 12 years. Received the Lohmann Medal from Oklahoma State for Outstanding Contributions to ISE Education and Research (1992) and the Armitage Medal for Outstanding Contributions to Logistics Engineering Literature (2004). Received the Holtzman Distinguished Educator Award from the Institute of Industrial Engineers (1990) and the Pioneer Award from the International Council on Systems Engineering (2000). Founder (2005) and President of the Omega Alpha Association: the Systems Engineering Honor Society and President of Alpha Pi Mu: the Industrial Engineering Honor Society (2010-12). Elected to the rank of Fellow in the American Association for the Advancement of Science (1980), the American Society for Engineering Education (2007), the Institute of Industrial Engineers (1978), and the International Council on Systems Engineering (1999). Served or serving on the Boards of ABET, APM, ASEE, IIE, INCOSE, and OAA. Co-author of six Prentice Hall textbooks and Editor of the Pearson Prentice Hall International Series in Industrial and Systems Engineering.